



McCoy Soudal Sealants Adhesives & Foams Pvt. Ltd.

McCoy Corporate Tower, C-55, Okhla Industrial Area, Phase-I, New Delhi - 110020

Tel.: +91 11 40623344 (100 Lines), Fax No.: +91 11 26811896, Helpline No.: +91 9958094318, info@mccoysoudal.com

West

Unit No. 7, Pranav Chambers, Plot No. 77 & 80,
Sector -19 C, Behind SBI, APMC Market,
Vashi, New Mumbai - 400705
Tel.: +91 22 27801918, Mob.: +91 9320612799

East

C-15, Survey Park,
Kolkata - 700075 (W.B.)
Tel.: +91 33 24264838
Mob.: +91 9831809961

South

Plot No. C-98, 3rd Cross, III Stage,
Peenya Industrial Area, Bengaluru - 560058
Tel.: +91 80 41250637 / 40902653
Mob.: +91 9611955885

www.mccoysoudal.com



**8 in 1
Multi Spray**



LUBRICATES • PROTECTS


www.mccoysoudal.com

McCoy Soudal 8 IN 1 MULTI SPRAY

High quality universal spray with 8-fold action:

1. Rust dissolver
2. Lubricant
3. Cleaner
4. Water-repellent
5. Penetration oil
6. Corrosion-resistant
7. Contact spray
8. Shock spray

Aerosol is pressurised with CO₂ gas

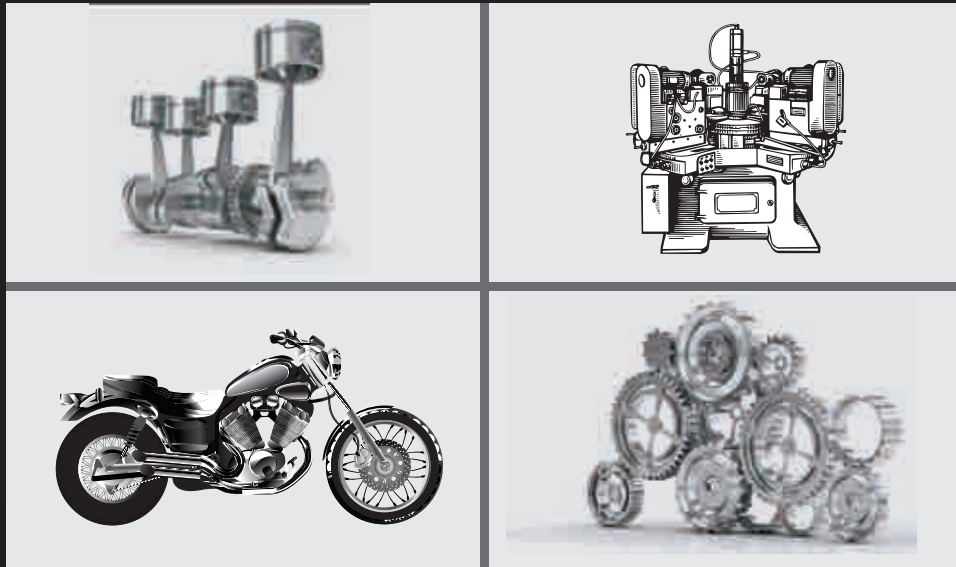

APPLICATIONS

To be used on screws, bolts, nuts, moving parts, axles, hinges, chains, garden tools, etc....It is corrosion-resistant. Has a penetration action and a protective film remains after cleaning. Does not corrode plastics and metals. Prolongs the life of rubbers.

CHARACTERISTICS

- Lubricates
- Protects
- Rust and corrosion resistant
- Water-repellent
- Removes dirt and grease
- Cooling and shrinking effect (Shock spray)
- Silicone free
- For in and outdoor use
- Aerosol can be used in any angle (360°)

TECHNICAL DATA

Base	Mixture based on mineral oil
Consistency	Liquid
Specific Gravity	0.81 g/ml
Viscosity (20 °C)	1 mPa.s
Flash Point	52 °C
pH Value	Neutral
Temperature resistance	-50 °C to +190 °C
Solubility in water	Fully soluble
VOC content	84%

PACKAGING

- Color: White
- Packaging: Aerosol of 400 ml

SHELF LIFE

3 years in unopened packaging in a cool and dry storage place at temperatures between +5 °C and +25 °C

SURFACES

Type: All metals and synthetic materials.
State of surface: Clean, dry, free of dust and grease.

HEALTH AND SAFETY RECOMMENDATIONS

Apply only in a ventilated area. In case of contact with eyes, wash with water and soap.

INSTRUCTIONS

Clean the surface thoroughly, de-grease and make it dry. Shake the canister before use. Spray from approx. 20•25 cm distance from the surface. Apply as required. When used as Contact Spray, switch on the electric installations back only when the spray has evaporated. When used as a Rust Dissolver, wait for 5-10 minutes. To improve accuracy, replace white nozzle with the black one.

